

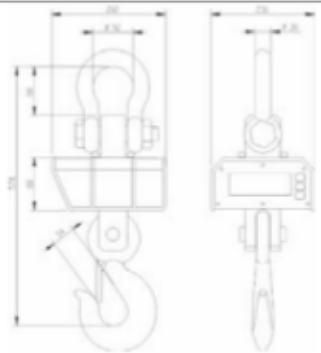


specification

model	OCS-K										
Picture											
display	LED module display										
hook	American standard eye hook										
shackle	American standard bow shackle										
enclosure	die-cast Aluminum case										
battery	6V/4Ah rechargeable battery										
remote controller	infrared remote controller										
function	ZERO/TARE/HOLD										
	Battery supervision/ overload alarm/ unit switch										
accuracy class	GB/T 11883-2002 III equivalent to OIML R76										
tare range	100% F.S.(FULL SCALE)										
zero range	4% F.S.										
overload alarm	100% F.S.+9e										
battery life	more than 80h										
temperature range	-10℃~40℃										
At the expense of additional accessories	<p>standard accessories</p> 										
dimension	 <table border="1" data-bbox="854 1272 1383 1374"> <thead> <tr> <th>最大秤量 Max.cap.</th> <th>最小秤量 Min.cap.</th> <th>分度值 d</th> <th>分度数 n</th> </tr> </thead> <tbody> <tr> <td>10t</td> <td>100kg</td> <td>5kg</td> <td>2000</td> </tr> </tbody> </table>			最大秤量 Max.cap.	最小秤量 Min.cap.	分度值 d	分度数 n	10t	100kg	5kg	2000
最大秤量 Max.cap.	最小秤量 Min.cap.	分度值 d	分度数 n								
10t	100kg	5kg	2000								